


- LG49-VRV3B Finish(B)
- LG49-VRV3BG Finish(BG)
- LG49-VRV3C Finish(C)
- LG49-VRV3D Finish(D)

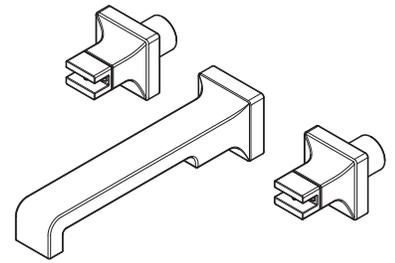

Specifications

- 3-Hole Installation
- Trim Only, Valve Not Included

Features

- 1.2 GPM Flow Rate
- Trim Only, Valve Not Included. Must Order LOW8-0200 Separately
- Fixed Hubs
- Ribbon Water Flow
- Mounting Hardware Included
- UltraSeal™ Ceramic Disc Valve
- Supply Lines Not Included
- Optional Handles Available:
 - For L Handles Order HHL-VRVL*
 - For T Handles Order HHL-VRVT*
 - For Cross Handles Order HHL-VRVX*
- Extension Kit Available 951-3689 Must Order Separately
- Limited Lifetime Warranty

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

