


RT6-4MFC Finish(C)

RT6-4MFK Finish(K)

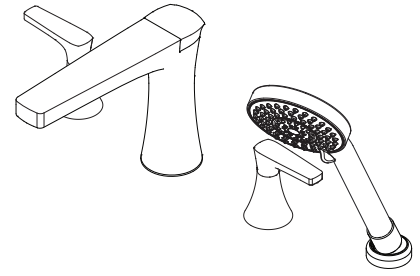

Specifications

- 4-Hole Installation
- Trim Only, Valve Not Included

Features


- 10 GPM Flow Rate
- 4-Hole Installation
- All Metal Construction
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1

Dimensions

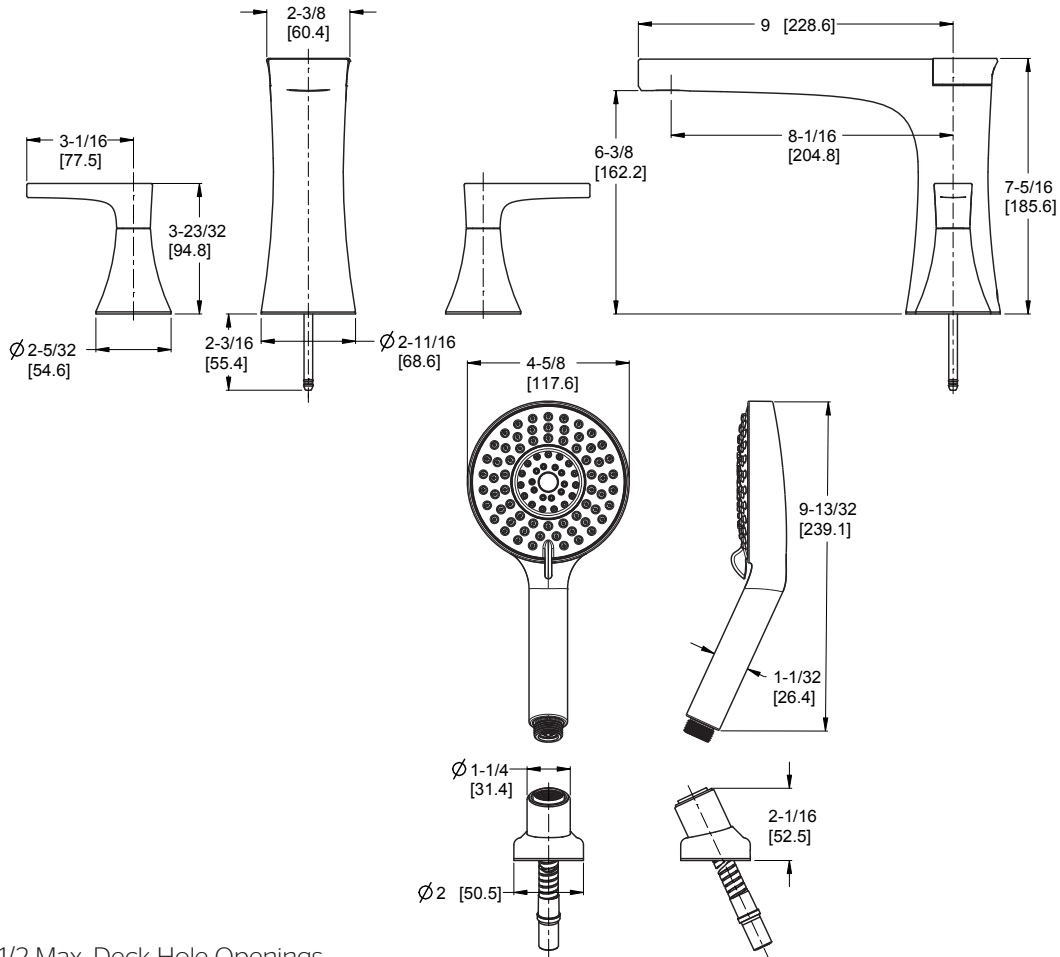

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings