

Highlights

- Single-Post Mounting Option
- Solid Brass Construction
- MatchMakers® Accessories Available

Code Compliance

Price Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO certified
- ASME A112.18.1
- CSA B125 certified
- ANSI A117.1 (Lever handles only)

42 Series

PARISA™

4" Centerset Lavatory Faucet

Single Control

1 or 3-Hole Installation

Ceramic Disc Valves

Finishes	J42-A5FC	J42-AMCB	J42-AMCC	J42-AMCK	J42-AMFB	J42-AMFC	J42-AMFK	J42-ANFC	T42-AGFC	T42-AMCB	T42-AMCC	T42-AMCK	T42-AMCP	T42-AMFB	T42-AMFC	T42-AMFK	T42-AMFP	T42-ANFC
Polished Chrome	x	x			x		x	x		x				x				x
Polished Chrome with Brass Accents		x			x					x				x				
Pforever Pfinish® Polished Brass													x				x	
Satin Nickel				x			x					x					x	

Features	J42-A5FC	J42-AMCB	J42-AMCC	J42-AMCK	J42-AMFB	J42-AMFC	J42-AMFK	J42-ANFC	T42-AGFC	T42-AMCB	T42-AMCC	T42-AMCK	T42-AMCP	T42-AMFB	T42-AMFC	T42-AMFK	T42-AMFP	T42-ANFC
20" Flexible Stainless Steel Supply Lines	x				x	x	x	x	x					x	x	x	x	x
16" Copper Supply Lines, Less Fittings		x	x	x						x	x	x	x					
Job Pack Quantities	x	x	x	x	x	x	x	x										
Less Pop-Up								x	x									x
Metal Pop-Up		x	x	x	x	x	x			x	x	x	x	x	x	x	x	x
50/50 Pop-Up	x																	
Includes Cap for Pop-Up Hole								x										x
Grid Strainer									x									
High-Arc Decorative Spout	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Single Control Ceramic Disc Valve	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Step-By-Step Installation Instructions	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Pforever Warranty®	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x



- J42-A5FC
- J42-AMCB
- J42-AMCC
- J42-AMCK
- J42-AMFB
- J42-AMFC
- J42-AMFK
- J42-ANFC
- T42-AGFC
- T42-AMCB
- T42-AMCC
- T42-AMCK
- T42-AMCP
- T42-AMFB
- T42-AMFC
- T42-AMFK
- T42-AMFP
- T42-ANFC

For additional information, please contact your Price Pfister representative, or visit our website at www.pricepfister.com.

Project: _____

Contractor: _____

1-800-PFAUCET www.pricepfister.com
19701 DaVinci, Lake Forest, CA 92610
10/27/06

Price Pfister®
 Pfreshest Ideas in Pfaucets.



INSTALLATION DIMENSIONS

42 Series

PARISA™

4" Centerset Lavatory Faucet

Critical Dimensions:	
Inlet Connection	1/2-14 NPSM
Minimum Hole Size	1 1/8 Dia Thru Hole
Valve Centerline to Back Splash	2 3/16 Min.

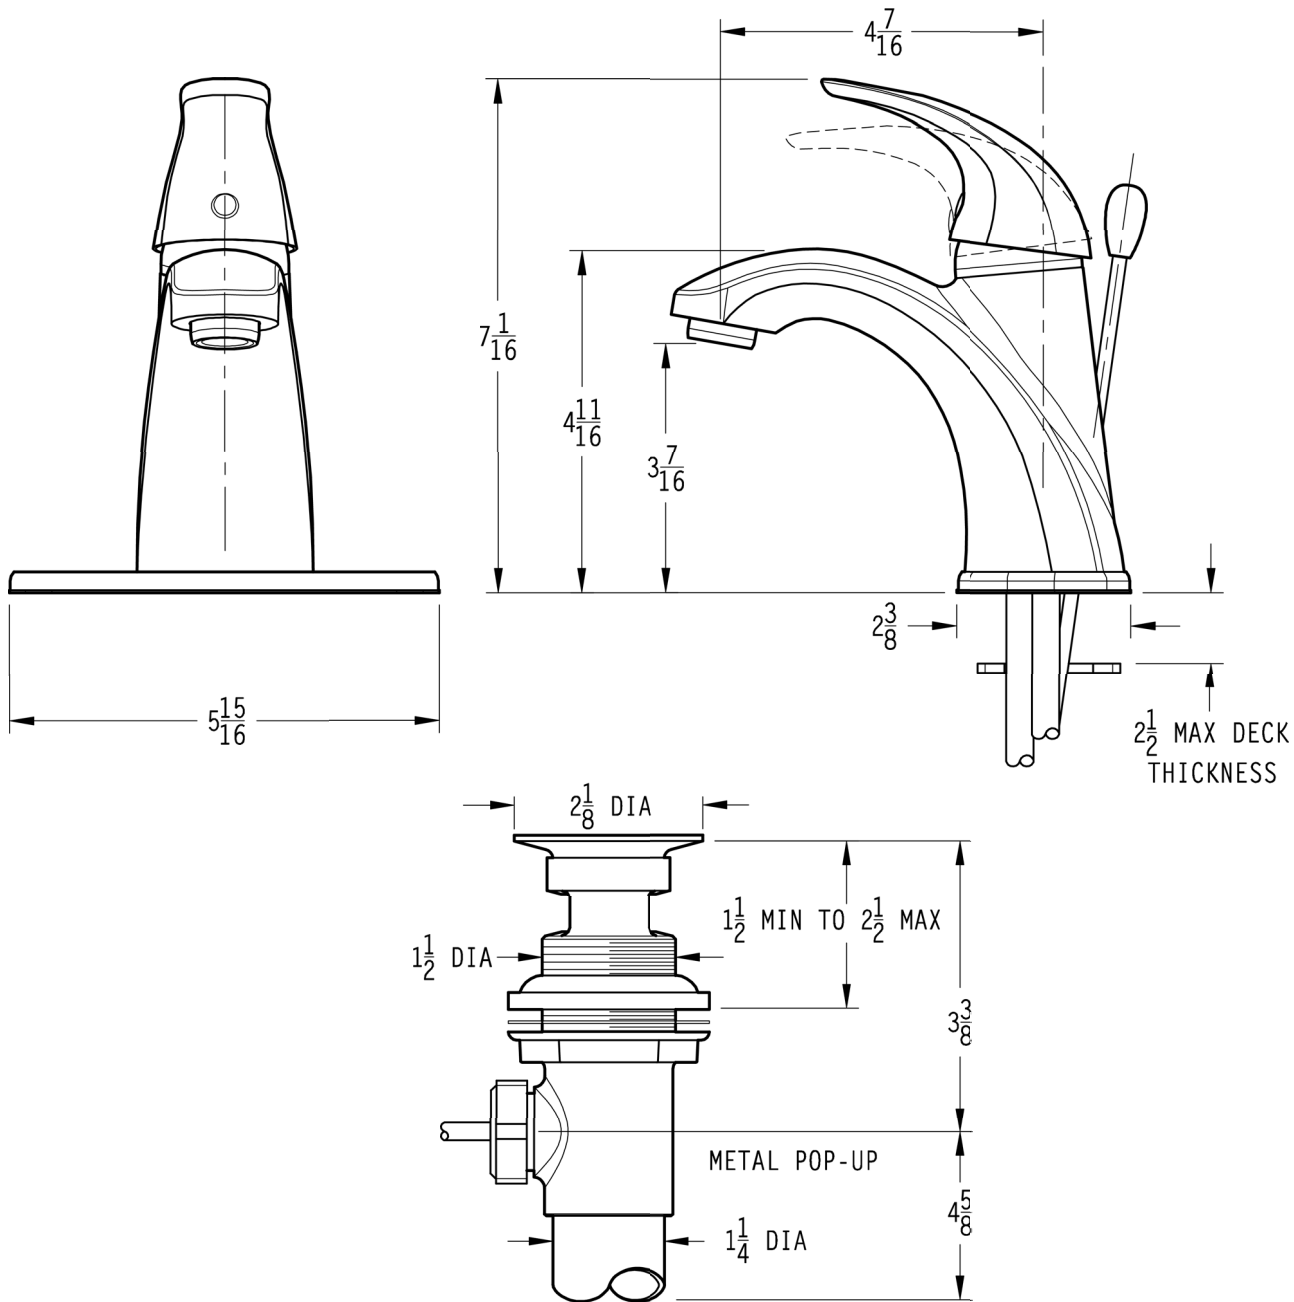

CAUTION:
When using the compression fittings in this package, with these types of installations, the installer must flare or bead the water supply lines to avoid blow-out conditions. Avoiding such steps in the installation of the unit may result in water damage.

Connect inlet supply lines by assembling brass supply nut (A), friction ring (B) and cone washer (C) onto 3/8" O.D. straight copper tube. Bead or flare. Wrench tighten.

Dimensions are in Inches

1-800-PFAUCET www.pricepfister.com
19701 DaVinci, Lake Forest, CA 92610
10/27/06

Price Pfister®
Pf freshest Ideas in Pf faucets.

SS-042-01